

EL3122 | EtherCAT Terminal, 2-channel analog input, current, 4...20 mA, 16 bit, differential

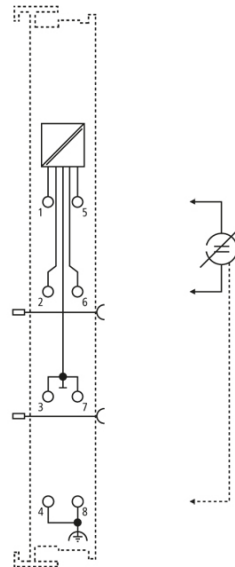
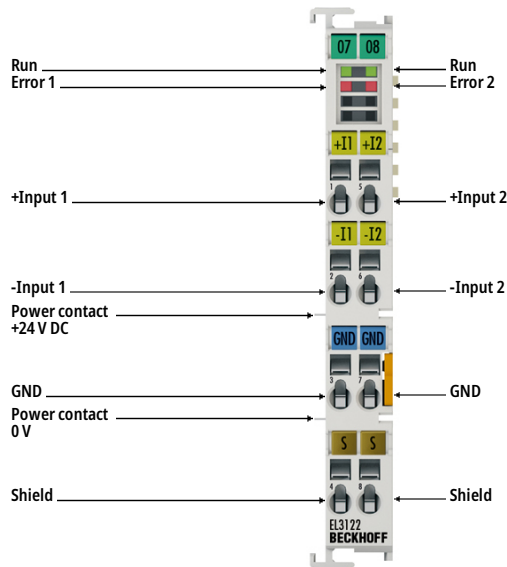



Image similar, may contain optional accessories

i **Product status:** regular delivery

The EL3122 analog input terminal processes signals in the range between 4 and 20 mA. The current is digitized to a resolution of 16 bits and is transmitted, electrically isolated, to the higher-level automation device. The input channels of the EtherCAT Terminal have differential inputs and possess a common, internal ground potential. The EL3122 combines two channels in one housing. An open lead or overload condition are detected. The terminal status is relayed to the controller via the E-bus. The EtherCAT Terminal indicates its signal state by means of light emitting diodes. The error LEDs indicate an overload condition and a broken wire.

Product information

Technical data

Technical data	EL3122
Number of inputs	2 (differential)
Power supply	via the E-bus
Signal current	4...20 mA
Distributed clocks	yes
Internal resistance	typ. 85 Ω + diode voltage
Input filter limit frequency	5 kHz

Common mode voltage U_{cm}	max. 10 V
Conversion time	~ 50 μ s (fast mode ~ 35 μ s)
Resolution	16 bit (incl. sign)
Measurement error/uncertainty	< $\pm 0.3\%$ (relative to full scale value)
Surge voltage resistance	max. 35 V
Electrical isolation	500 V (E-bus/signal voltage)
Current consumption E-bus	typ. 170 mA
Current consumption power contacts	–
Bit width in the process image	inputs: 8 byte
Special features	standard and compact process image, activatable FIR/IIR filters, limit value monitoring
Weight	approx. 55 g
Operating temperature	-25...+60°C
Storage temperature	-40...+85°C
Relative humidity	95%, no condensation
Vibration/shock resistance	conforms to EN 60068-2-6/EN 60068-2-27
EMC immunity/emission	conforms to EN 61000-6-2/EN 61000-6-4
Plug-in wiring level	for all ESxxxx terminals
Protect. rating/installation pos.	IP20/variable
Approvals/markings	CE, CCC, UL, ATEX, IECEx
Ex marking	ATEX: II 3 G Ex ec IIC T4 Gc IECEx: Ex ec IIC T4 Gc

Housing data	EL-12-8pin	ES-12-8pin
Design form	compact terminal housing with signal LEDs	terminal housing with pluggable wiring level
Material	polycarbonate	
Installation	on 35 mm DIN rail, conforming to EN 60715 with lock	
Side by side mounting by means of	double slot and key connection	
Marking	labeling of the BZxxxx series	
Wiring	solid conductor (s), flexible conductor (st) and ferrule (f): spring actuation by screwdriver	
Connection cross-section	s*: 0.08...2.5 mm ² , st*: 0.08...2.5 mm ² , f*: 0.14...1.5 mm ²	s*: 0.08...1.5 mm ² , st*: 0.08...1.5 mm ² , f*: 0.14...1.5 mm ²

Connection cross-section AWG	s*: AWG28...14, st*: AWG28...14, f*: AWG26...16	s*: AWG28...16, st*: AWG28...16, f*: AWG26...16
Stripping length	8...9 mm	9...10 mm
Current load power contacts	I _{max} : 10 A	
Dimensions (W x H x D)	12 mm x 100 mm x 68 mm	

*s: solid wire; st: stranded wire; f: with ferrule

Ordering information

Ordering information	
EL3122	EtherCAT Terminal, 2-channel analog input, current, 4...20 mA, 16 bit, differential
ES3122	EtherCAT Terminal, 2-channel analog input, current, 4...20 mA, 16 bit, differential, pluggable wiring level