



Pressure transmitter

MBS 5100 / MBS 5150

For marine applications

Description

The ship approved high accuracy block pressure transmitter is designed for use in almost all marine applications. MBS 5150 with integrated pulse snubber is designed for use in marine applications with severe medium influences like cavitation, liquid hammer, or pressure peaks and offers a reliable pressure measurement, even under harsh environmental conditions.

The transmitters can be easily mounted directly on the MBV 5000 block test valve or the threaded pressure connection can be used.

The flexible pressure transmitter programme covers a 4 – 20 mA output signal, absolute or gauge (relative) versions, measuring ranges from 0 – 4 up to 0 – 400 bar.


Excellent vibration stability, robust construction, and a high degree of EMC / EMI protection equip the pressure transmitter to meet the most stringent marine requirements.

Features & benefits

- Designed for use in severe maritime environments
- MBS 5150 with integrated pulse-snubber is suitable in marine applications with severe medium influences like cavitation, liquid hammer or pressure peaks and offers a reliable pressure measurement, even under harsh environmental conditions
- Pressure connection of acid-resistant stainless steel (AISI 316L)
- Pressure ranges in relative (gauge) or absolute from 4 up to 400 bar
- Output signal: 4 – 20 mA
- A wide range of pressure connections
- Fully digitally compensated
- Accuracy 0.3% FS (max)
- UL approved
- Several Marine approvals

Applications

Application and media conditions for MBS 5150



1 Pulse-snubber

Application

Cavitation, liquid hammer and pressure peaks may occur in hydraulic systems with changes in flow velocity, e.g. fast closing of a valve or pump starts and stops. Liquid backlash can create huge pressure peaks of a non uniform nature and damage the diaphragm. The problem may occur on the inlet and outlet side, even at rather low operating pressures.

Media condition

Clogging of the nozzle may occur in liquids containing particles. Mounting the transmitter in an upright position minimizes the risk of clogging, because the flow in the nozzle is limited to the start-up period until the dead volume behind the nozzle orifice is filled. The media viscosity has only little effect on the response time. Even at a viscosities up to 100 cSt, the response time will not exceed 4 ms.

Ordering

Product code numbers

MBS 51		[] [] - [] [] [] [] 1 - [] [] [] [] - [] []																																	
		Gasket / O-ring material <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td style="width: 5%;">0</td><td>No gasket</td></tr> <tr><td>2</td><td>Gasket, NBR -40° – 85°C</td></tr> <tr><td>4</td><td>O-ring, NBR -40° – 85°C</td></tr> </table>										0	No gasket	2	Gasket, NBR -40° – 85°C	4	O-ring, NBR -40° – 85°C																		
0	No gasket																																		
2	Gasket, NBR -40° – 85°C																																		
4	O-ring, NBR -40° – 85°C																																		
Type <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td style="width: 80%;">Standard</td><td style="width: 20%;">0 0</td></tr> <tr><td>With pulse snubber</td><td>5 0</td></tr> </table>		Standard	0 0	With pulse snubber	5 0	Pressure connection <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td style="width: 30%;">C B 0 4</td><td>G ¼ female</td></tr> <tr><td>C C 0 4</td><td>¼ – NPT female</td></tr> <tr><td>D A 0 5</td><td>M10 × 1 female with flange</td></tr> <tr><td>D B 0 4</td><td>G ¼ female with flange connection</td></tr> </table> Figures refer to plug and standard PIN configuration – see Electrical connections <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td style="width: 15%;">A0</td><td>No plug (EN 175301-803-A)</td></tr> <tr><td>A1</td><td>Plug (EN 175301-803-A), Pg 9</td></tr> <tr><td>A6</td><td>Plug (EN 175301-803-A), Pg 11</td></tr> <tr><td>H3</td><td>Plug (EN 175301-803-A), M20</td></tr> <tr><td>J7</td><td>Plug (EN175301-803-A), PG 9 Steel</td></tr> </table>										C B 0 4	G ¼ female	C C 0 4	¼ – NPT female	D A 0 5	M10 × 1 female with flange	D B 0 4	G ¼ female with flange connection	A0	No plug (EN 175301-803-A)	A1	Plug (EN 175301-803-A), Pg 9	A6	Plug (EN 175301-803-A), Pg 11	H3	Plug (EN 175301-803-A), M20	J7	Plug (EN175301-803-A), PG 9 Steel		
Standard	0 0																																		
With pulse snubber	5 0																																		
C B 0 4	G ¼ female																																		
C C 0 4	¼ – NPT female																																		
D A 0 5	M10 × 1 female with flange																																		
D B 0 4	G ¼ female with flange connection																																		
A0	No plug (EN 175301-803-A)																																		
A1	Plug (EN 175301-803-A), Pg 9																																		
A6	Plug (EN 175301-803-A), Pg 11																																		
H3	Plug (EN 175301-803-A), M20																																		
J7	Plug (EN175301-803-A), PG 9 Steel																																		
Measuring range <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td style="width: 70%;">0 – 4.0 bar</td><td style="width: 30%;">1 6</td></tr> <tr><td>0 – 6.0 bar</td><td>1 8</td></tr> <tr><td>0 – 10 bar</td><td>2 0</td></tr> <tr><td>0 – 16 bar</td><td>2 2</td></tr> <tr><td>0 – 25 bar</td><td>2 4</td></tr> <tr><td>0 – 40 bar</td><td>2 6</td></tr> <tr><td>0 – 60 bar</td><td>2 8</td></tr> <tr><td>0 – 100 bar</td><td>3 0</td></tr> <tr><td>0 – 160 bar</td><td>3 2</td></tr> <tr><td>0 – 250 bar</td><td>3 4</td></tr> <tr><td>0 – 400 bar</td><td>3 6</td></tr> </table>		0 – 4.0 bar	1 6	0 – 6.0 bar	1 8	0 – 10 bar	2 0	0 – 16 bar	2 2	0 – 25 bar	2 4	0 – 40 bar	2 6	0 – 60 bar	2 8	0 – 100 bar	3 0	0 – 160 bar	3 2	0 – 250 bar	3 4	0 – 400 bar	3 6	Output signal <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 10%;">1</td> <td style="width: 90%;">4 – 20 mA</td> </tr> </table>										1	4 – 20 mA
0 – 4.0 bar	1 6																																		
0 – 6.0 bar	1 8																																		
0 – 10 bar	2 0																																		
0 – 16 bar	2 2																																		
0 – 25 bar	2 4																																		
0 – 40 bar	2 6																																		
0 – 60 bar	2 8																																		
0 – 100 bar	3 0																																		
0 – 160 bar	3 2																																		
0 – 250 bar	3 4																																		
0 – 400 bar	3 6																																		
1	4 – 20 mA																																		
Pressure reference <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td style="width: 80%;">Gauge (relative)</td><td style="width: 20%;">1</td></tr> <tr><td>Absolute</td><td>2</td></tr> <tr><td>Sealed gauge</td><td>3</td></tr> </table>		Gauge (relative)	1	Absolute	2	Sealed gauge	3																												
Gauge (relative)	1																																		
Absolute	2																																		
Sealed gauge	3																																		

Note: Non-standard build-up combinations may be selected. However, minimum order quantities may apply. Please contact your local Danfoss office for further information or request on other versions.

Note: For a detailed overview of our existing code numbers, please visit the Danfoss Product Store at store.danfoss.com. You can use the filtering options to find the right sensor for your specific needs.

Product details

General data

Performance (EN 60770)

Description		Values
Accuracy (incl. non-linearity, hysteresis and repeatability)		$\leq \pm 0.1 \% \text{ FS (typ.)}$
		$\leq \pm 0.3 \% \text{ FS (max.)}$
Non-linearity BFSL (conformity)		$\leq \pm 0.2 \% \text{ FS}$
Hysteresis and repeatability		$\leq \pm 0.1 \% \text{ FS}$
Response time	Liquids with viscosity < 100 cSt	< 4 ms
	Air and gases (MBS 5150)	< 35 ms
Overload pressure (static)		$6 \times \text{FS (max. 1500 bar)}$
Burst pressure		$6 \times \text{FS (max. 2000 bar)}$
Power-up time		< 50ms
Durability, P: 10 – 90 % FS		$> 10 \times 10^6 \text{ cycles}$
MTTFd - Calculation based on the SN 29500		> 100 Years

Electrical specifications

Description	Values
Nom. output signal (short-circuit protected)	4 – 20 mA
Supply voltage [UB], polarity protected	9 – 32 V DC
Supply voltage dependency	$\leq \pm 0.1 \% \text{ FS} / 10 \text{ V}$
Current limitation (linear output signal up to $1.5 \times$ rated range)	22.4 mA
Load [RL] (load connected to 0 V)	$RL \leq (U_b - 9 \text{ V}) / 0.02 \text{ A } [\Omega]$

Environmental conditions

Description		Values
Sensor temperature range	Normal	-40 – 85 °C
Media temperature range		-40 – 85 °C
Ambient temperature range (depending on electrical connection)		-40 – 85 °C
Compensated temperature range		0 – 80 °C
Transport / storage temperature range		-50 – 85 °C
EMC – Emission		EN 61000-6-3
EMC – Immunity		EN 61000-6-2
Insulation resistance		> 100 MΩ at 500 V
Vibration stability	Sinusoidal	15.9 mm-pp, 5 Hz – 25 Hz
		20 g, 25 Hz – 2 kHz
	Random	7.5 grms, 5 Hz – 1 kHz
Shock resistance	Shock	500 g / 1 ms
	Free fall	1 m
Enclosure (IP protection fulfilled together with mating connector)		IP65 (IP54 ATEX Zone 2)



Explosive atmospheres

Zone 2 applications ⁽¹⁾	CEEx II 3G Ex ec IIA T4 Gc -20°C<Ta<+85°C	EN60079-0, EN60079-7
------------------------------------	--	----------------------

⁽¹⁾The Pressure transmitter must be installed where it cannot be exposed to impact in normal use

Mechanical characteristics

Description			Values
Electrical connection			EN 175301-803-A plug
Electrical connection, material			Glass filled polyamide PA 6.6
Wetted parts, material	Versions without flange connection		EN 10088-1; 1.4404 (AISI 316L)
	Versions with flange connection	Pressure connection	AISI 316L
		Plug	Nickel plated brass
		Plug gasket	W.no. 10388 Sn5
		O-ring for flange	NBR
Enclosure material			Anodized AlMgSiPb
Net weight			0.4 kg




Dimensions

Plug M20, EN 175301-803-A	Plug Pg 9 – 11, EN 175301-803-A

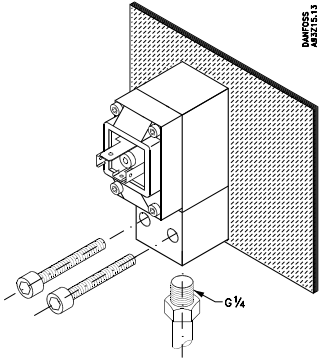
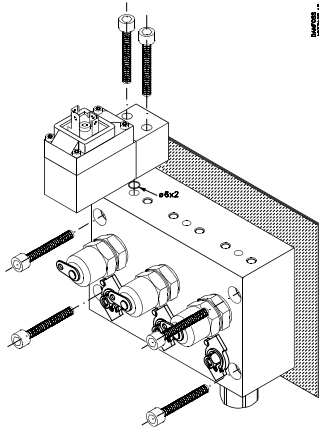


Connections

Electrical connections

Plug type, page 4	A6	H3	A0/A1/J7
	 EN 175301-803-A, Pg 11	 175301-803-A, M20	 175301-803-A, Pg 9
Electrical connection, 4 – 20 mA output (2 wire)	Pin 1: + supply Pin 2: ÷ supply Pin 3: Function test 40 – 200 mV  Earth: Connected to MBS enclosure	Pin 1: + supply Pin 2: ÷ supply Pin 3: Function test 40 – 200 mV  Earth: Connected to MBS enclosure	Pin 1: + supply Pin 2: ÷ supply Pin 3: Function test 40 – 200 mV  Earth: Connected to MBS enclosure

Mechanical connection

Thread	Flange
	

Certificates, declarations and approvals

The list contains all certificates, declarations, and approvals for this product type. Individual code number may have some or all of these approvals, and certain local approvals may not appear on the list.

When you click on the link you will be directed to the latest version of the 'Declaration of Conformity'. Products developed and sold before this date of issue conform to the directives/standards in force at the time of their sale.

Approval type	Title	Issuer	Approval topic
Electrical Safety Certificate	UL E311982	UL - Underwriters Laboratories inc.	
Electrical Safety Certificate	UL E510763	UL - Underwriters Laboratories inc.	
Manufacturer's Declaration	Danfoss MD 060R3160.00	Danfoss	China RoHS
Pressure Safety Certificate	TSSA CRN.0F18477.5123467890YTN	TSSA - Technical Standards & Safety Authority	CRN
Explosive Safety Certificate	UL E227388	UL - Underwriters Laboratories inc.	UL-CSA, Explosive
Marine Certificate	RINA ELE031621XP	RINA - Registro Italiano Navale	Marine
Marine Certificate	NKK TA21099M	ClassNK - The Japanese Marine Association	Marine
Electrical Safety Certificate	UL E494625	UL - Underwriters Laboratories inc.	
Electrical Safety Certificate	UL E31024	UL - Underwriters Laboratories inc.	
EU-UK Declaration	Danfoss EU-UK 064G9615.11	Danfoss	EMC, EU RoHS, ATEX, UK RoHS
Marine Certificate	DNV TAA000013G Rev.2	DNV	
UA Declaration	Danfoss UA 2023-01-10 Regulators PL01 PL04	Danfoss	Pressure, PED
Pressure Safety Certificate	LLC CDC EURO-TYSK UA.TR.089.1015.05-22	LLC CDC EURO TYSK - Ukraine	Pressure
Marine Certificate	CCS TJ22PTB00047	CCS - China Classification Society	Marine
UA Declaration	Danfoss UA 2024-07-25 cooling sensors	Danfoss	LVD, EMC
Marine Certificate	LR 2584360TA	LR - Lloyd's Register	Marine
EAC Declaration	EAC KZ 7100841.13.12.00005	EAC - Eurasian Customs Union	EMC
Marine Certificate	BV 06094-G0 BV	BV - Bureau Veritas	Marine
Marine Certificate	KR DLN 34014-AE001	KR - Korean Register of Shipping	Marine
Export Control Declaration	Pressure & Temperature Sensors	Danfoss	
Marine Certificate	26-0602166-PDA	ABS - American Bureau of Shipping	Marine
EU Declaration	PL 04 Packaging	Danfoss	Packaging

Contact details

Online support

Danfoss offers a wide range of support along with our products, including digital information, software, mobile apps and expert guidance. See the possibilities below.



The Danfoss Design center

Discover the Design Center, our advanced digital platform that streamlines product selection. With integrated tools and enhanced type pages, it's simpler than ever to access product information and documentation, and to select the right products. Check the availability of Danfoss products at partner locations and enjoy seamless transitions from selection to purchase with our basket-to-basket functionality. Whether you're buying from our distributors or directly from the Product Store, the Design Center simplifies your experience. Learn more at: designcenter.danfoss.com.



The Danfoss product store

The Danfoss Product Store is a one-stop shop available 24/7 for our customers, no matter where you are in the world or what area of industry you work in. Browse our catalog, check product details and documentation, view your prices and product availability, and quickly finalize your purchase. Start browsing at: store.danfoss.com.



Danfoss Partner Portal/Product Data tool

Designed to support you with easy access to product data extracts, essential resources, tools, and information. The Partner Portal provides a centralized hub for product documentation, training materials, marketing assets, and technical support, ensuring you have everything you need to succeed and grow your business with Danfoss. The Partner Portal is available 24/7 at: partner.danfoss.com and is ready to support your business.



Find technical documentation

Find technical documentation you need to get your project up running. Get direct access to our official collection of data sheets, certificates and declarations, manuals and guides, 3D models and drawings, case stories, brochures, and much more. Start searching now at: documentation.danfoss.com.



Danfoss Learning

Danfoss Learning is a free online learning platform. It features courses and materials specifically designed to help engineers, installers, service technicians, and wholesalers better understand the products, applications industry topics, and trends that will help you do your job better. Find your local Danfoss website here: learning.danfoss.com.



Get local information and support

Local Danfoss websites are the main sources for help and information about our company and products. Find product availability, get the latest regional news, or connect with a nearby expert - all in your own language. Find your local Danfoss website here: danfoss.com.

Danfoss A/S

Climate Solutions . danfoss.com . +45 7488 2222

Any information, including, but not limited to information on selection of product, its application or use, product design, weight, dimensions, capacity or any other technical data in product manuals, catalogues description, advertisements, etc. and whether made available in writing, orally, electronically, online or via download, shall be considered informative, and is only binding if and to the extent, explicit reference is made in a quotation or order confirmation. Danfoss cannot accept any responsibility for possible errors in catalogues, brochures, videos and other material. Danfoss reserves the right to alter its products without notice. This also applies to products ordered but not delivered provided that such alterations can be made without changes to form, fit or function of the products. All trademarks in this material are property of Danfoss A/S or Danfoss group companies. Danfoss and the Danfoss logo are trademarks of Danfoss A/S. All rights reserved.
