

Product offering


HelioFuse DC10 1 000VDC



Minimum Breaking Capacity = 2 In ; Maximum Breaking Capacity = 50 kA			
Maximum operating voltage	**Rated Current**	**Cat. Number ***	**Packaging**
1 050 VDC @ L/R = 5 ms	5	DC10GC11C5	10
	8	DC10GC11C8	10
	10	DC10GC11C10	10
	12	DC10GC11C12	10
1 000 VDC @ L/R = 5 ms	16	DC10GC10C16	10
	20	DC10GC10C20	10

Drawing

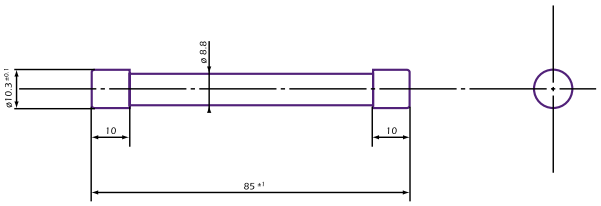


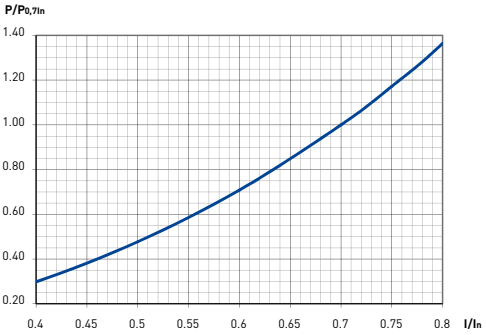

Electrical characteristics

In (A)	Cat. Number *	Losses (W) @0.7 In 20° C
8	DC10GC10V8	2.0
10	DC10GC10V10	2.3
12	DC10GC10V12	3.0
16	DC10GC10V16	1.45
20	DC10GC10V20	1.65


Corrective factor for power losses vs. ambient temperature

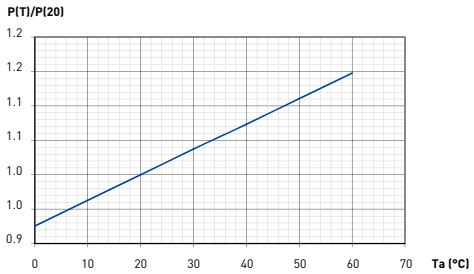


Fuse clips

Cat. Number	Designation	Weight (g)	Pack
MR10RESSORTCI	MR10 CI	4.5	200
MR10RESSORT	MR10	7.0	20
MR10RESSORTSP	MR10 without compressor	5.7	20

MR10 CI



MR10



MR10 without compressor

