

续表 6

序号	熔断体型号				额定 电压 (V)	额定 电流 (A)	外形尺寸 (mm)										重量 (g)
	本公司		国内外同类产品				图 号	A	B	C	φD	E	F	H	φd		
	普通 (gG)	快速 (aR)	普通 (gG)	快速 (aR)													
0503	RG1	RGS1	TIA	-	500	4~35	6.2	54	73	85	22	9.5	1.5	25	5.5×7.5	55	
0504	RG4	RGS4	-	GSG	690/800	10~100	6.2	49.5	61	77	16.5	12.5	2.0	18	6.5×9	32	
0505	RG6	RGS6	-	GSA	500	80	6.2	68	94	113	31	19	2.0	33	9×11.5	146	
0506	RG7	-	TCP	-	500	100	6.2	68	94	113	34	19	2.0	35	9×11.5	228	
0507	RG11	RGS11	-	CR2L GSB	250	16~75	6.2	27.5	42	56	16.5	12.5	2.0	17.5	6.5×9	25	
0508	RG12	RGS12	-	CR2L GSB	250	75~175	6.2	31.5	58	80	26	19	3.0	27	9×11.5	79.5	
0509	RG14	RGS14	-	GSB	500	5~20	6.2	31	37	46	8.5	7	0.8	9.5	4.5×6	6	
0510	RG14B	RGS14B	-	GSB	500	5~20	6.2	54	64	73	8.5	7	0.8	9.5	4.5×6	8.5	
0511	RG15	RGS15	-	CR2L GSB	250	200	6.2	34	60	88	30	25	3.0	36	11×13	120	
0512	RG17	RGS17	-	GSB	500	40~100	6.2	54	78	96	22.2	20.5	2	24	9×12	62.3	
0513	RG18	RGS18	-	CR6L	600	75~150	6.2	40	70	95	30	25	3.2	33	11×13	147	
0514	RG19	RGS19	-	CR6L	600	175~325	6.2	43	82	107	37	30	4.0	42	11×13	219	
0515	RG0H	-	AAO		500	2~32	6.2	34	72	84	13.5	9.4	1.2	15	5.5×7.8	18	
0516	RG4AD	RGS4AD	-	250GH	250	32~160	6.2	29	56	77	23.8	20	3	25.5	9×14	39	
0517	RG4A	RGS4A	-	660GH	660	125~200	6.2	50	77	98	23.8	20	3	25.5	9×14	53	
0518	RG4B	RGS4B	-	660GH	660	225~315	6.2	50.5	82	108	31	25	3	34	10.5×16	75	
0519	RG4BH	RGS4BH	-		1000	225~315	6.2	70	100	126	31	25	3	34	10.5×16	96	
0520	RG2-2	RGS2-2	-		500	32~63	6.2	50	90	105	25	19	2.5	28	9×11.5	82	
0521	RG38	RGS38	-		250	125~400	6.2	34	60	86	38	25	3	41	11×14	48	
0522	RG5-2	RGS5-2	-		1200	16~75	6.2	109	127	140	26	13	1.5	28	6.5×9	106	

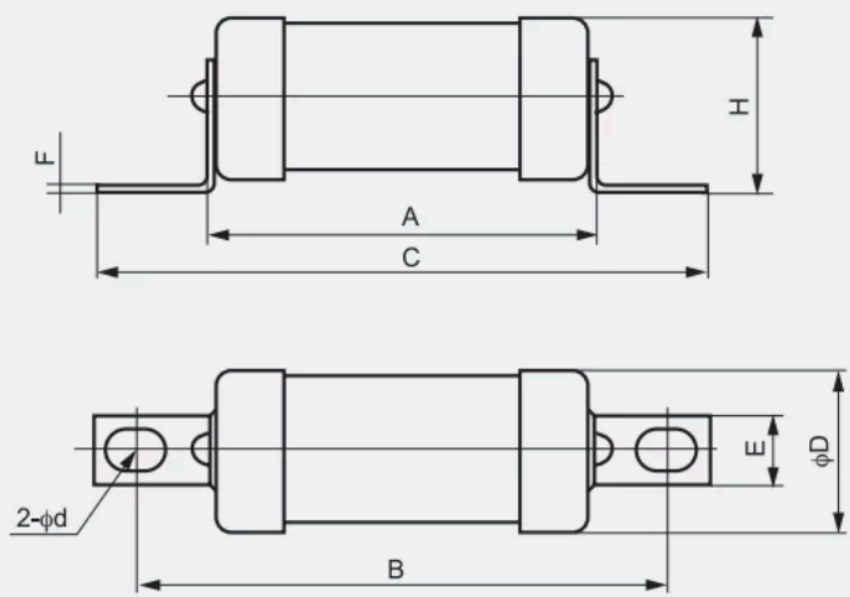


图 6.2