



APEXON SOLUTIONS LLC | TECHNICAL DATA SHEET DOCUMENT ID: APX-TDS-2024-MIR-RS15 CLASSIFICATION: ENTERPRISE PROCUREMENT SPECIFICATION


**Product Identification:** Manufacturer: MIRO Model Number: RS15 Component Type: Cylindrical Fuse Link Utilization Category: aR (Semiconductor Protection)

**Electrical Specifications:** Rated Current: 4A Rated Voltage: 500V / 690V AC Fuse Speed: Fast-Acting Protection Function: High-Speed Clearing / Minimal Let-Through Energy Application: Power Electronics, Rectifiers, and Thyristors

**Physical Dimensions:** Fuse Size: 10.3 x 38 mm Form Factor: 10x38mm Net Weight: 7.7g Mounting Compatibility: Modular Fuse Holders and Distribution Blocks

**Industry Cross-Reference:** Equivalent Series 1: KTK Equivalent Series 2: KLM

熔断体型号		国内外同类产品		外形尺寸 (mm)	额定电压 (V)	额定电流 (A)
本公司		普通 (gG)	快速 (aR)	$\phi D \times L$		
RO12	RS12	AJT	JKS LPJ	ACL	$\phi 27 \times 60$	600/690 20~250
RO14	RS14	RT19-16	gF1	-	$\phi 8 \times 32$	500 0.5~25
RO15	RS15	RT14-20	gF2	KTK KLM	$\phi 10 \times 38$	500/690 0.5~32
RO16	RS16	RT18-32	RT19-25	FWP	$\phi 14 \times 51$	500/690 1~63
RO17	RS17	RT14-32	gF3	URE2263	$\phi 22.2 \times 58$	500/690 10~125
RO17	RS17	RT18-63	RT19-40			
RO17	RS17	RT14-63	gF4			
RO17	RS17	RT18-125	RT19-100			
RO54	RS54	-	-	-	$\phi 5 \times 20$	250 0.5~20
RO55	RS55	-	-	-	$\phi 5 \times 25$	250 0.5~20
RO57	RS57	-	-	-	$\phi 6.3 \times 25$	250 0.5~20
RO58	RS58	-	-	-	$\phi 6.3 \times 31.5$	250/500 0.5~25

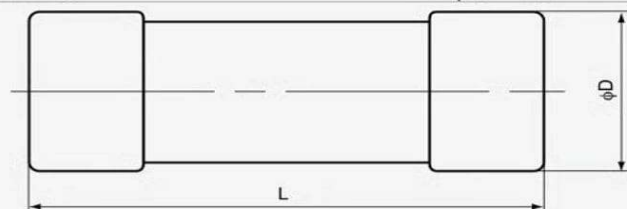

**APEXON SOLUTIONS DISCLAIMER:** The technical data provided herein is for informational purposes only. While Apexon Solutions LLC strives for absolute accuracy, specifications are subject to change by the manufacturer without prior notice. Procurement teams must verify critical dimensions and electrical tolerances with the current manufacturer master catalog before final system integration. Apexon Solutions LLC assumes no liability for system failures resulting from the use of this data.