CM200DY-12NF

HIGH POWER SWITCHING USE

CM200DY-12NF




- I_C 200A
- V_{CES} 600V
- Insulated Type
- 2-elements in a pack

APPLICATION

General purpose inverters & Servo controls, etc

OUTLINE DRAWING & CIRCUIT DIAGRAM

Dimensions in mm

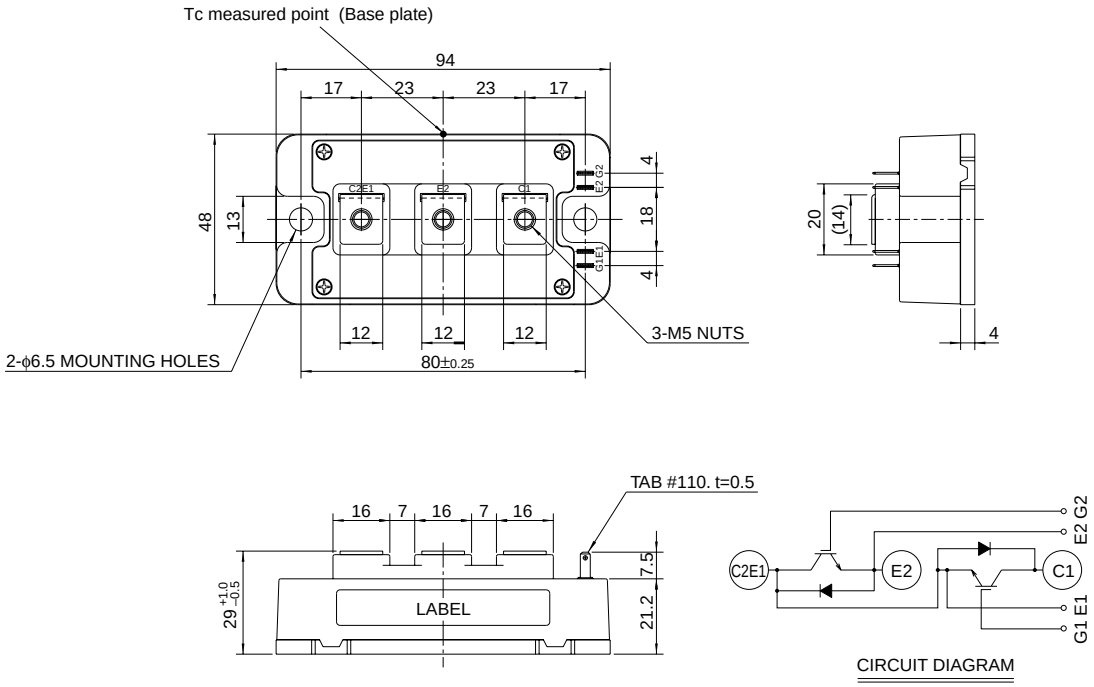

MITSUBISHI ELECTRIC

http://store.iiic.cc/

MAXIMUM RATINGS (Tj = 25°C)

Symbol	Parameter	Conditions	Ratings	Unit
V_{CES}	Collector-emitter voltage	G-E Short	600	V
V_{GES}	Gate-emitter voltage	C-E Short	±20	V
I_C	Collector current	DC, T_C' = 93°C*3	200	A
I_{CM}		Pulse (Note 2)	400	A
I_E (Note 1)	Emitter current		200	A
I_{EM} (Note 1)		Pulse (Note 2)	400	A
P_C (Note 3)	Maximum collector dissipation	T_C = 25°C	650	W
T_j	Junction temperature		–40 ~ +150	°C
T_{stg}	Storage temperature		–40 ~ +125	°C
V_{iso}	Isolation voltage	Main Terminal to base plate, AC 1 min.	2500	V
—	Torque strength	Main Terminal M5	2.5 ~ 3.5	N • m
—		Mounting holes M6	3.5 ~ 4.5	N • m
—	Weight	Typical value	310	g

ELECTRICAL CHARACTERISTICS (Tj = 25°C)

Symbol	Parameter	Test conditions		Limits			Unit
				Min.	Typ.	Max.	
I_{CES}	Collector cutoff current	V_{CE} = V_{CES}, V_{GE} = 0V		—	—	1	mA
$V_{GE(th)}$	Gate-emitter threshold voltage	I_C = 20mA, V_{CE} = 10V		5	6	7.5	V
I_{GES}	Gate leakage current	V_{GE} = V_{GES}, V_{CE} = 0V		—	—	0.5	µA
$V_{CE(sat)}$	Collector-emitter saturation voltage	T_j = 25°C	I_C = 200A, V_{GE} = 15V	—	1.7	2.2	V
		T_j = 125°C		—	1.7	—	
C_{ies}	Input capacitance	V_{CE} = 10V, V_{GE} = 0V		—	—	30	nF
C_{oes}	Output capacitance			—	—	3.7	nF
C_{res}	Reverse transfer capacitance			—	—	1.2	nF
Q_G	Total gate charge	V_{CC} = 300V, I_C = 200A, V_{GE} = 15V		—	800	—	nC
$t_{d(on)}$	Turn-on delay time	V_{CC} = 300V, I_C = 200A, V_{GE1} = V_{GE2} = 15V, R_G = 3.1Ω, Inductive load switching operation, I_E = 200A		—	—	120	ns
t_r	Turn-on rise time			—	—	120	ns
$t_{d(off)}$	Turn-off delay time			—	—	300	ns
t_f	Turn-off fall time			—	—	300	ns
t_{rr} (Note 1)	Reverse recovery time			—	—	150	ns
Q_{rr} (Note 1)	Reverse recovery charge			—	3.5	—	µC
V_{EC}(Note 1)	Emitter-collector voltage	I_E = 200A, V_{GE} = 0V		—	—	2.6	V
$R_{th(j-c)Q}$	Thermal resistance*1	IGBT part (1/2 module)		—	—	0.19	°C/W
$R_{th(j-c)R}$		FWDi part (1/2 module)		—	—	0.35	°C/W
$R_{th(c-f)}$	Contact thermal resistance	Case to fin, Thermal compound Applied*2 (1/2 module)		—	0.07	—	°C/W
$R_{th(j-c')Q}$	Thermal resistance	Tc measured point is just under the chips		—	—	0.13*3	°C/W
R_G	External gate resistance			3.1	—	31	Ω


*1 : Tc measured point is shown in page OUTLINE DRAWING.
*2 : Typical value is measured by using Shin-etsu Silicone "G-746".
*3 : Tc' measured point is just under the chips.
If you use this value, $R_{th(f-a)}$ should be measured just under the chips.

Note 1. I_E, V_{EC}, t_{rr} & Q_{rr} represent characteristics of the anti-parallel, emitter to collector free-wheel diode (FWDi).
2. Pulse width and repetition rate should be such that the device junction temp. (T_j) does not exceed T_{jmax} rating.
3. Junction temperature (T_j) should not increase beyond 150°C.


http://store.iiic.cc/

PERFORMANCE CURVES


OUTPUT CHARACTERISTICS (TYPICAL)

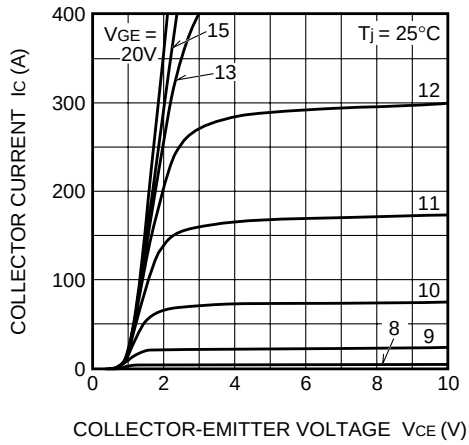


COLLECTOR-EMITTER SATURATION VOLTAGE CHARACTERISTICS (TYPICAL)

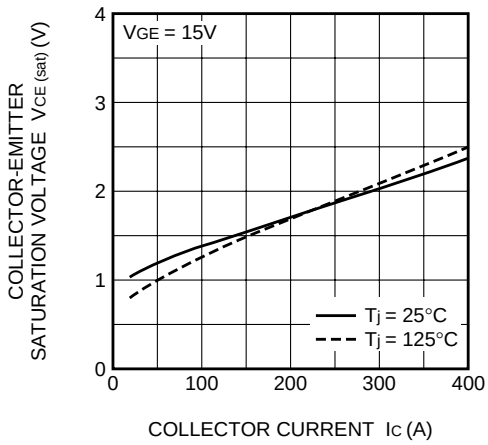


COLLECTOR-EMITTER SATURATION VOLTAGE CHARACTERISTICS (TYPICAL)

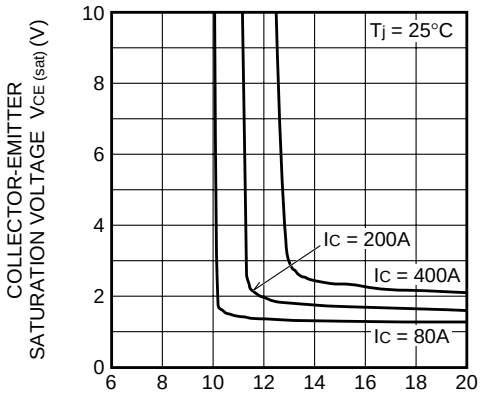


FREE-WHEEL DIODE FORWARD CHARACTERISTICS (TYPICAL)

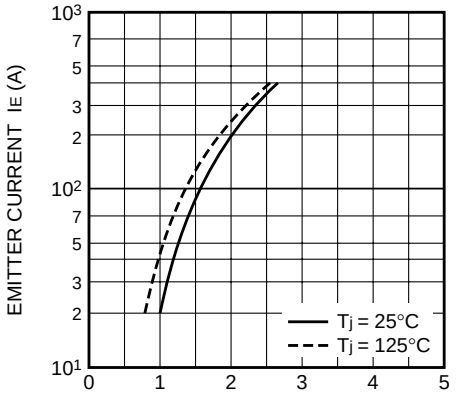

CAPACITANCE–VCE CHARACTERISTICS (TYPICAL)

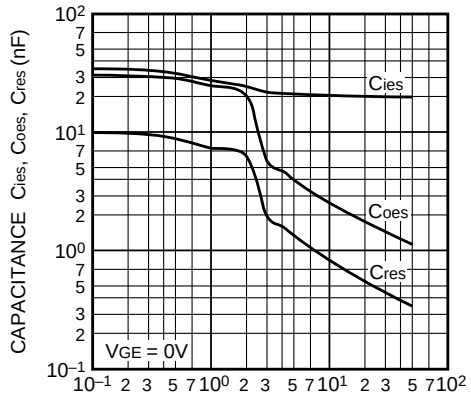


HALF-BRIDGE SWITCHING CHARACTERISTICS (TYPICAL)

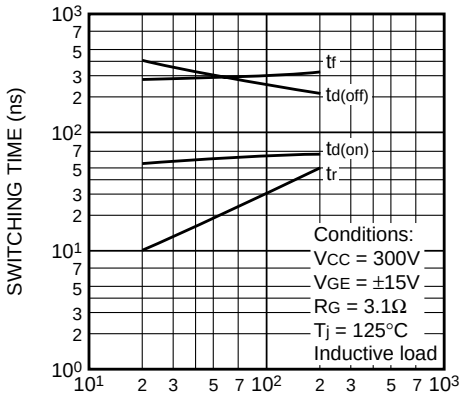


http://store.iiic.cc/


REVERSE RECOVERY CHARACTERISTICS OF FREE-WHEEL DIODE (TYPICAL)

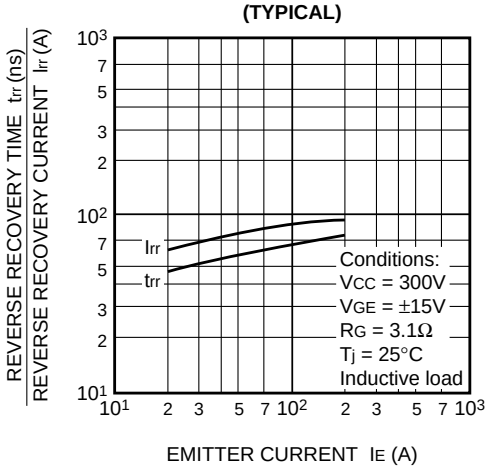

TRANSIENT THERMAL IMPEDANCE CHARACTERISTICS (IGBT part & FWDi part)

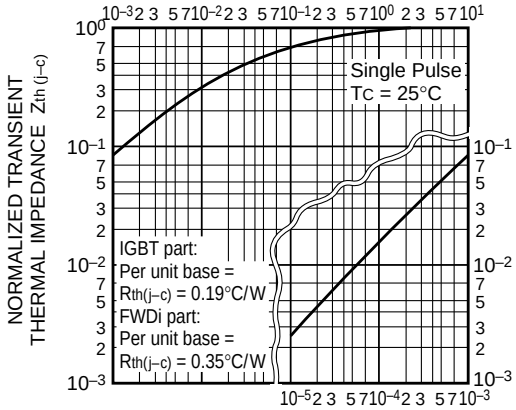

GATE CHARGE CHARACTERISTICS (TYPICAL)

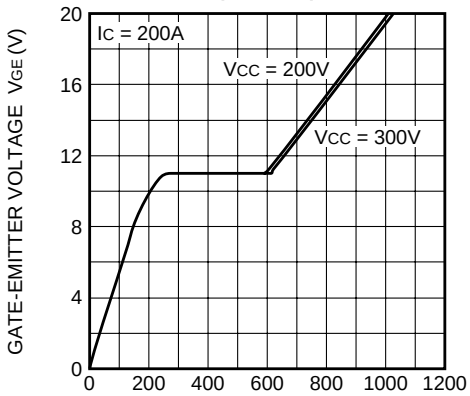

http://store.iiic.cc/