



690 V

NH000 - 00

usE180276

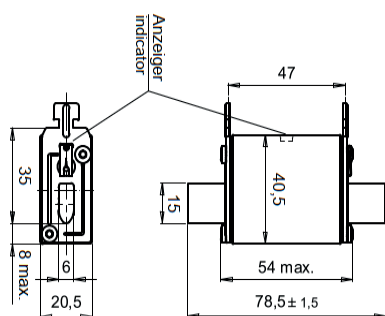

20 477 34

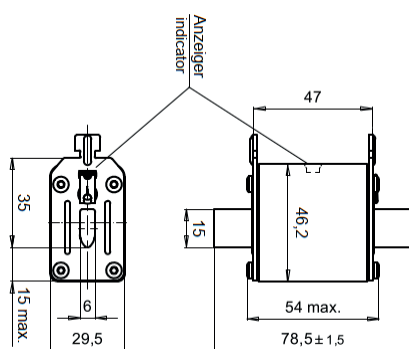

20 209 34

Verpackungseinheit / Packing unit: 3 Stück / 3 pieces

Betriebsklasse / Class
gRL (gS)

IEC 60 269-4
VDE 0636-4
UL 248-13

Bemessungs- spannung Rated Voltage	Artikel Nr. Article No	Größe Size	Bemessungs- strom Rated current
V			A
690/700 V	20 477 34	NH000	16-80
690/700 V	20 209 34	NH00	100-200

Bemessungsausschaltvermögen / Rated breaking capacity

100 kA @ AC 760 V
200 kA @ AC 700 V
25 kA @ DC 220 V (L/R = 10 ms)
210 kA @ AC 800 V (100-160 A)

Bemessungsstrom Rated Current	Artikel Nr. Article No.	Gewicht Weight	Bemessungs- spannung Rated Voltage	Schmelzintegral Pre-Arcing I ² t-Value	Ausschaltintegral Total I ² t-Value	Leistungsabgabe Power Loss
	mit Kombimelder with combi indicator		IEC 60269-4	UL 248-13	@ AC 690 V	
A		kg / 1	V	V	A ² s	W
16	20 477 34.16	0,13	690	700	18	3,2
20	20 477 34.20	0,13	690	700	41	3,6
25	20 477 34.25	0,13	690	700	74	4,2
32	20 477 34.32	0,13	690	700	170	5,0
35	20 477 34.35	0,13	690	700	170	5,2
40	20 477 34.40	0,13	690	700	300	5,6
50	20 477 34.50	0,13	690	700	460	6,5
63	20 477 34.63	0,13	690	700	840	7,6
80	20 477 34.80	0,13	690	700	1.800	8,8
100	20 209 34.100	0,21	690	700	3.000	10,5
125	20 209 34.125	0,21	690	700	6.000	12
160	20 209 34.160	0,21	690	700	10.400	17
200	20 209 34.200	0,21	690	700	16.000	21

Applikationskoeffizienten / Application coefficients (Weiterführende Informationen [hier zum Download](#) / for more information [download here](#))


a	A2	B1 max.	B2	Cf3
130	0,9	1,25	0,5	0,8

690 V

NH000 - 00

us E180276

Zeit/Strom-
Kennlinien
Time-current
characteristics

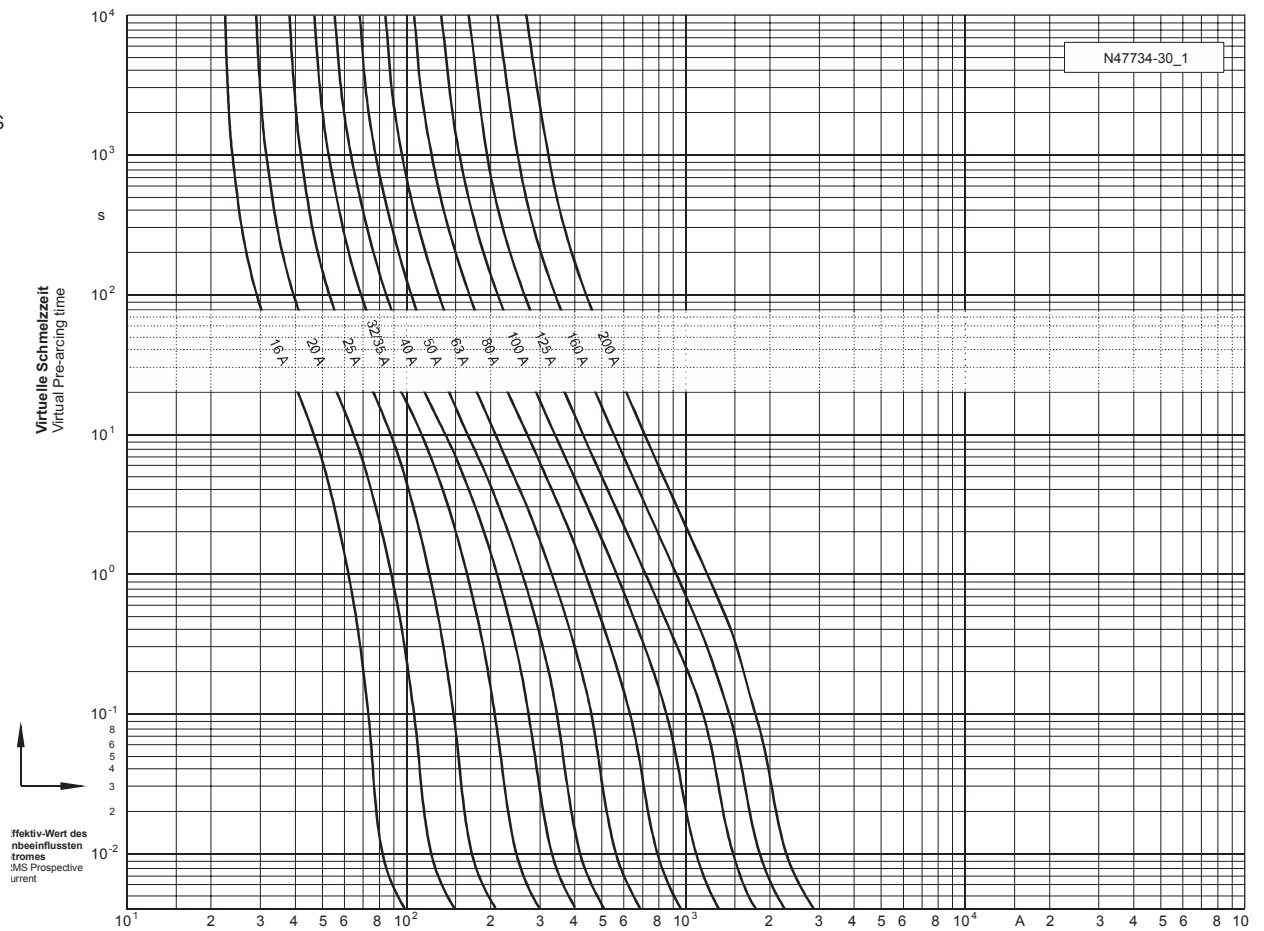

Durchlass-Strom
Cut-off current

