SIEMENS

Data sheet 3NE3334-0B



SITOR fuse link, with slotted blade contacts, NH2, In: 500 A, aR, Un AC: 1000 V, front indicator

Model	
product brand name	SENTRON
product designation	SITOR fuse link
design of the product	With slotted blade contacts
design of an identification indicator	front indicator
design of the switching contact	With blade contacts, silver-plated
design of the fuse link	SITOR, LV HRC design
General technical data	
size of fuse system / acc. to DIN EN 60269-1	NH2
operating class of the fuse link	aR
varying load factor (WL)	1
Supply voltage	
type of voltage	AC
operational current / at AC / rated value	500 A
supply voltage	
● at AC / rated value	1 000 V
Switching capacity	
switching capacity current	
● acc. to IEC 60947-2 / rated value	100 kA
Dissipation	
power loss [W]	90 W
power loss [W]	
● for rated value of the current / at AC / in hot operating state / per pole	90 W
● maximum	90 W
Product details	
product description	Not non-interchangeable
Mechanical Design	
mounting position	Any, preferably vertical
net weight	785 g
Environmental conditions	
ambient temperature / during operation	
● minimum	-20 °C
● maximum	50 °C
environmental category	-20 to +50 at 95% relative humidity
Certificates	
reference code	

Subject to change without notice
© Copyright Siemens


● acc. to DIN EN 61346-2	F
● acc. to IEC 81346-2	F

General Product Approval			Declaration of Conformity	Test Certificates	other
CCC	UR	EAC	EG-Konf.	Special Test Certificate	Miscellaneous

Further information

Information- and Downloadcenter (Catalogs, Brochures,…)
http://www.siemens.com/lowvoltage/catalogs
Industry Mall (Online ordering system)
https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3NE3334-0B
Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
https://support.industry.siemens.com/cs/ww/en/ps/3NE3334-0B
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)
http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3NE3334-0B
Tender specifications
http://www.siemens.com/specifications

Subject to change without notice
© Copyright Siemens

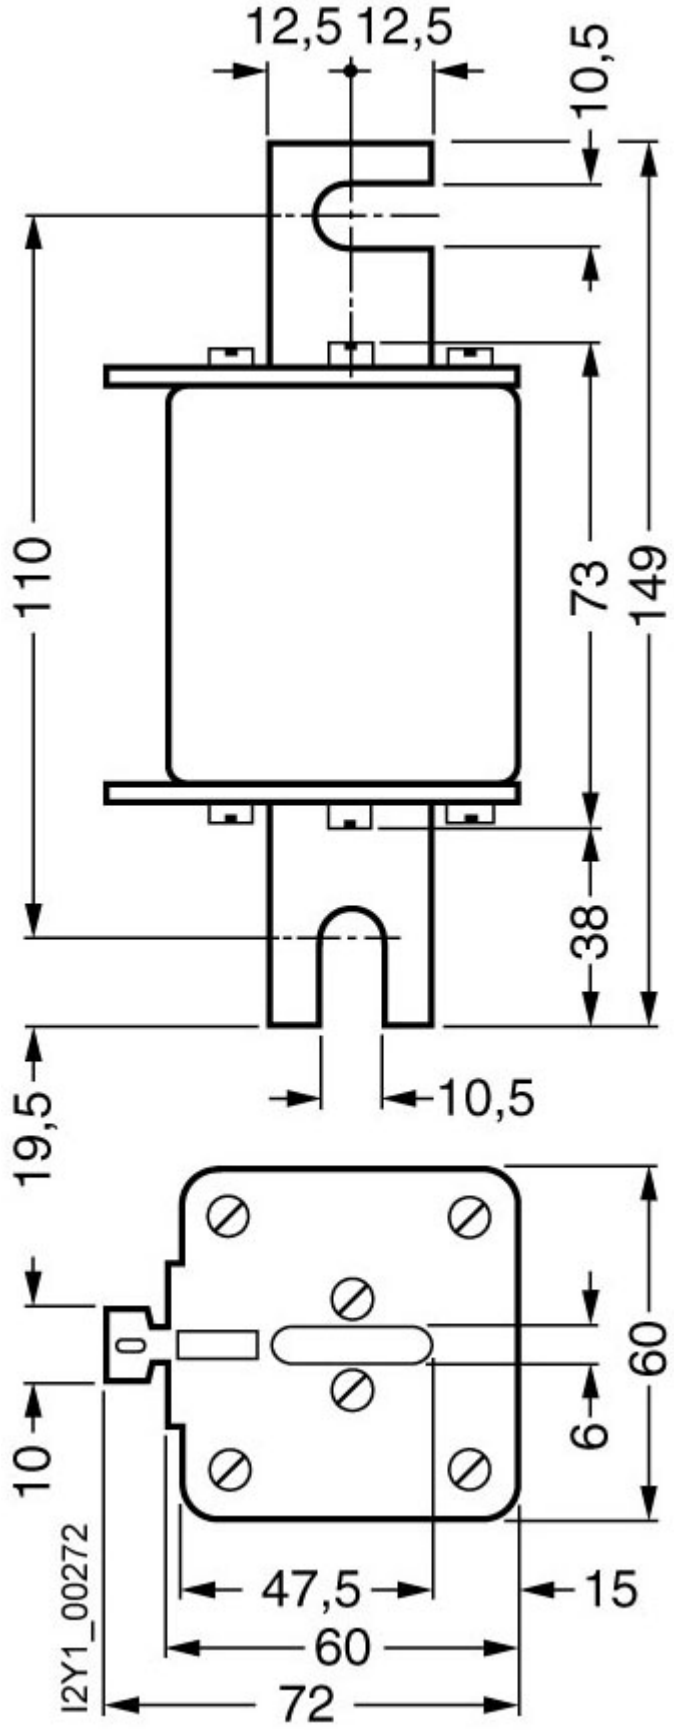

Subject to change without notice
© Copyright Siemens