



DC750V 10A-100A




序号	型号	尺寸代码	额定电流 A	I <sup>2</sup> t (A <sup>2</sup> s)		功耗W		重量 g	最小包装数量	最大包装数量	备注
				弧前	熔断	0.5I <sub>n</sub>	I <sub>n</sub>				
31	EV325-3EL10A	3EL	10	10	65	0.58	2.9	10.2±1	36	576	安装螺栓M5 推荐扭矩 (4.5±1.0) N.m
32	EV325-3EL15A		15	24	145	0.86	4.3				
33	EV325-3EL20A		20	68	402	0.92	4.6				
34	EV325-3EL25A		25	134	787	1.02	5.1				
35	EV325-3EL30A		30	222	1301	1.16	5.8				
36	EV325-3EL40A		40	463	2714	1.42	7.1				
37	EV325-3EL50A	50	2930	6420	1.80	9.0					
38	EV325-3ELC10A	3ELC	10	10	65	0.58	2.9	14.5±1	36	576	安装螺栓M5 扭矩 4.5±1N·m
39	EV325-3ELC15A		15	24	145	0.86	4.3				
40	EV325-3ELC20A		20	68	402	0.92	4.6				
41	EV325-3ELC25A		25	134	787	1.02	5.1				
42	EV325-3ELC30A		30	222	1301	1.16	5.8				
43	EV325-3ELC40A		40	463	2714	1.42	7.1				
44	EV325-3ELC50A	50	2930	6420	1.80	9.0					
45	EV325-3EH10A	3EH	10	10	65	0.58	2.9	10.3±1.5	144	288	单引脚插入式
46	EV325-3EH15A		15	24	145	0.86	4.3				
47	EV325-3EH20A		20	68	402	0.92	4.6				
48	EV325-3EH25A		25	134	787	1.02	5.1				
49	EV325-3EH30A		30	222	1301	1.16	5.8				
50	EV325-3EH40A		40	463	2714	1.42	7.1				
51	EV325-3EH50A	50	2930	6420	1.80	9.0					
52	EV325-5FL20A	5FL	20	234	588	0.78	3.9	31.8±2	24	384	安装螺栓M5 推荐扭矩 (4.5±1.0) N.m
53	EV325-5FL30A		30	788	1976	0.82	4.1				
54	EV325-5FL40A		40	1276	3200	1.18	5.9				
55	EV325-5FL50A	50	2110	5290	1.70	8.5					

注： 1. 以上列表中的I<sup>2</sup>t数据均为标准试验环境下测得，试验电压DC (750±2) V；  
2. 接线按照GB/T31465；

产品外形尺寸 (mm)

4GII熔断器外形及安装尺寸

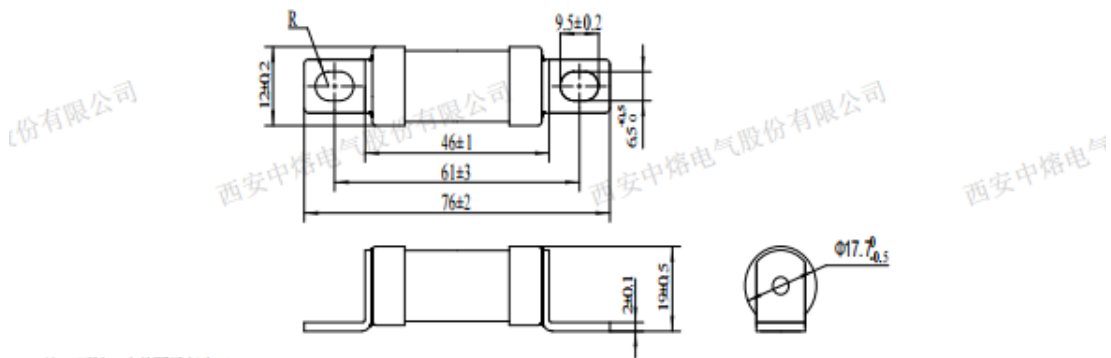

注：两触刀安装面平行度≤0.3

Disclaimer: This technical data sheet is provided by Apexon Solutions LLC for reference and procurement support only. Product specifications are subject to manufacturer documentation and may change without notice.