

# Product data sheet

Specifications



## Contactor, TeSys K, 3P, AC-3, It or eq to 440V, 6A, 1 NO aux, 24VDC coil

LP4K0610BW3

**Product availability: Stock - Normally stocked in distribution facility**

### Main

Range	TeSys
Product or Component Type	Contactor
Device short name	LP4K
Contactor application	Motor control

### Complementary

Utilisation category	AC-3 AC-3e AC-4
Poles description	3P
power pole contact composition	3 NO
[Ue] rated operational voltage	Power circuit <= 690 V AC <= 400 Hz Signalling circuit <= 690 V AC <= 400 Hz
[Ie] rated operational current	6 A (at <140 °F (60 °C)) at <= 440 V AC AC-3 for power circuit 6 A (at <140 °F (60 °C)) at <= 440 V AC AC-3e for power circuit
Control circuit type	DC wide range
[Uc] control circuit voltage	24 V DC
Motor power kW	1.5 kW 220...230 V AC 50/60 Hz AC-3 2.2 kW 380...415 V AC 50/60 Hz AC-3 3 kW 440/690 V AC 50/60 Hz AC-3 1.5 kW 220...230 V AC 50/60 Hz AC-3e 2.2 kW 380...415 V AC 50/60 Hz AC-3e 3 kW 440/690 V AC 50/60 Hz AC-3e 1.5 kW 220...230 V AC 50/60 Hz AC-4 2.2 kW 380...415 V AC 50/60 Hz AC-4 3 kW 440/690 V AC 50/60 Hz AC-4
Auxiliary contact composition	1 NO
[Uimp] rated impulse withstand voltage	8 kV
Overvoltage category	III
[Ith] conventional free air thermal current	20 A (at 140 °F (60 °C)) for power circuit 10 A (at 122 °F (50 °C)) for signalling circuit
Irms rated making capacity	110 A AC for power circuit conforming to IEC 60947 110 A AC for signalling circuit conforming to IEC 60947
Rated breaking capacity	110 A at 220...230 V conforming to IEC 60947 110 A at 380...400 V conforming to IEC 60947 110 A at 415 V conforming to IEC 60947 110 A at 440 V conforming to IEC 60947 80 A at 500 V conforming to IEC 60947 70 A at 660...690 V conforming to IEC 60947

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

<b>[Icw] rated short-time withstand current</b>	90 A 122 °F (50 °C) - 1 s for power circuit 85 A 122 °F (50 °C) - 5 s for power circuit 80 A 122 °F (50 °C) - 10 s for power circuit 60 A 122 °F (50 °C) - 30 s for power circuit 45 A 122 °F (50 °C) - 1 min for power circuit 40 A 122 °F (50 °C) - 3 min for power circuit 20 A 122 °F (50 °C) - >= 15 min for power circuit 80 A - 1 s for signalling circuit 90 A - 500 ms for signalling circuit 110 A - 100 ms for signalling circuit
<b>Associated fuse rating</b>	25 A gG at <= 440 V for power circuit 25 A aM for power circuit 10 A gG for signalling circuit conforming to IEC 60947 10 A gG for signalling circuit conforming to VDE 0660
<b>Average impedance</b>	3 mOhm - lth 20 A 50 Hz for power circuit
<b>[Ui] rated insulation voltage</b>	Power circuit 600 V UL 508 Power circuit 690 V IEC 60947-4-1 Signalling circuit 690 V IEC 60947-4-1 Signalling circuit 690 V IEC 60947-5-1 Signalling circuit 600 V UL 508 Power circuit 600 V CSA C22.2 No 14 Signalling circuit 600 V CSA C22.2 No 14
<b>Insulation resistance</b>	> 10 MOhm for signalling circuit
<b>Inrush power in W</b>	1.8 W 68 °F (20 °C))
<b>Hold-in power consumption in W</b>	1.8 W 68 °F (20 °C)
<b>Heat dissipation</b>	1.8 W
<b>Control circuit voltage limits</b>	Operational: 0.7...1.3 Uc (at <122 °F (50 °C)) Drop-out: >= 0.10 Uc (at <122 °F (50 °C))
<b>Connections - terminals</b>	screw clamp terminals 1 0.002...0.006 in <sup>2</sup> (1.5...4 mm <sup>2</sup> )solid screw clamp terminals 1 0.001...0.006 in <sup>2</sup> (0.75...4 mm <sup>2</sup> )flexible without cable end screw clamp terminals 1 0.0005...0.004 in <sup>2</sup> (0.34...2.5 mm <sup>2</sup> )flexible with cable end screw clamp terminals 2 0.002...0.006 in <sup>2</sup> (1.5...4 mm <sup>2</sup> )solid screw clamp terminals 2 0.001...0.006 in <sup>2</sup> (0.75...4 mm <sup>2</sup> )flexible without cable end screw clamp terminals 2 0.0005...0.002 in <sup>2</sup> (0.34...1.5 mm <sup>2</sup> )flexible with cable end Power circuit screw clamp terminals 2 0.002 in <sup>2</sup> (1.5 mm <sup>2</sup> )flexible with cable end
<b>Maximum operating rate</b>	3600 cyc/h
<b>Coil technology</b>	With integral suppression device
<b>Auxiliary contacts type</b>	Instantaneous 1 NO
<b>Minimum switching current</b>	5 mA for signalling circuit
<b>Minimum switching voltage</b>	17 V for signalling circuit
<b>Mounting Support</b>	Plate Rail
<b>Tightening torque</b>	7.08...11.5 lbf.in (0.8...1.3 N.m) screw clamp terminals Philips No 2 7.08...11.5 lbf.in (0.8...1.3 N.m) screw clamp terminals flat Ø 6 mm 7.08...11.5 lbf.in (0.8...1.3 N.m) screw clamp terminals pozidriv No 2
<b>Operating time</b>	10...20 ms coil de-energisation and NO opening 30...40 ms coil energisation and NO closing
<b>Safety reliability level</b>	B10d = 1369863 cycles contactor with nominal load EN/ISO 13849-1 B10d = 20000000 cycles contactor with mechanical load EN/ISO 13849-1
<b>Mechanical durability</b>	30 Mcycles
<b>Electrical durability</b>	1.3 Mcycles 6 A AC-3 <= 440 V 1.3 Mcycles 6 A AC-3e <= 440 V 0.05 Mcycles 36 A AC-4 <= 440 V
<b>Height</b>	2.3 in (58 mm)
<b>Width</b>	1.8 in (45 mm)
<b>Depth</b>	2.2 in (57 mm)

---

Net Weight	0.518 lb(US) (0.235 kg)
------------	-------------------------

## Environment

---

Standards	EN/IEC 60947-4-1 EN/IEC 60947-5-1 UL 60947-4-1 UL 60947-5-1 CSA C22.2 No 60947-4-1 CSA C22.2 No 60947-5-1 GB/T 14048.4
-----------	--

---

Product Certifications	CB Scheme CCC UL CSA EAC CE UKCA
------------------------	--

---

IP degree of protection	IP2X
-------------------------	------

---

Ambient air temperature for operation	-13...122 °F (-25...50 °C)
---------------------------------------	----------------------------

---

Ambient Air Temperature for Storage	-58...176 °F (-50...80 °C)
-------------------------------------	----------------------------

---

Operating altitude	6561.68 ft (2000 m) without derating
--------------------	--------------------------------------

---

Flame retardance	V1 conforming to UL 94 Requirement 2 conforming to NF F 16-101 Requirement 2 conforming to NF F 16-102
------------------	--

---

## Ordering and shipping details

---

Category	US10I1222321
----------	--------------

---

Discount Schedule	0112
-------------------	------

---

GTIN	3389110428568
------	---------------

---

Returnability	Yes
---------------	-----

---

Country of origin	ID
-------------------	----

---

## Packing Units

---

Unit Type of Package 1	PCE
------------------------	-----

---

Nbr. of units in pkg.	1
-----------------------	---

---

Package 1 Height	2.598 in (6.600 cm)
------------------	---------------------

---

Package 1 Width	1.890 in (4.800 cm)
-----------------	---------------------

---

Package 1 Length	2.441 in (6.200 cm)
------------------	---------------------

---

Package weight(Lbs)	7.760 oz (220.000 g)
---------------------	----------------------

---

Unit Type of Package 2	S02
------------------------	-----

---

Number of Units in Package 2	40
------------------------------	----

---

Package 2 Height	5.906 in (15.000 cm)
------------------	----------------------

---

Package 2 Width	11.811 in (30.000 cm)
-----------------	-----------------------

---

Package 2 Length	15.748 in (40.000 cm)
------------------	-----------------------

---

Package 2 Weight	20.205 lb(US) (9.165 kg)
------------------	--------------------------

---

Unit Type of Package 3	P06
------------------------	-----

---

Number of Units in Package 3	320
------------------------------	-----

---

Package 3 Height	17.717 in (45.000 cm)
------------------	-----------------------

---

---

<b>Package 3 Width</b>	23.622 in (60.000 cm)
<b>Package 3 Length</b>	31.496 in (80.000 cm)
<b>Package 3 Weight</b>	181.970 lb(US) (82.540 kg)

---

## **Contractual warranty**

---

<b>Warranty (in months)</b>	18
-----------------------------	----



## Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)



### Environmental footprint

Carbon footprint (kg CO2 eq, Total Life cycle) 68

## Use Better



### Materials and Substances

Packaging made with recycled cardboard Yes

Packaging without single use plastic Yes

[EU RoHS Directive](#) Compliant

REACH Regulation [REACH Declaration](#)

California proposition 65 **WARNING: This product can expose you to chemicals including: Antimony oxide & Antimony trioxide, which is known to the State of California to cause cancer. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)**

## Use Longer



### Lifetime extension

Repair No

## Use Again



### Repack and remanufacture

Circularity Profile [End of Life Information](#)

Take-back No


WEEE Label  The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Dimensions Drawings


Dimensions

---

Contactors LC1 K, LP1 K, LP4 K: Mounting on Panel

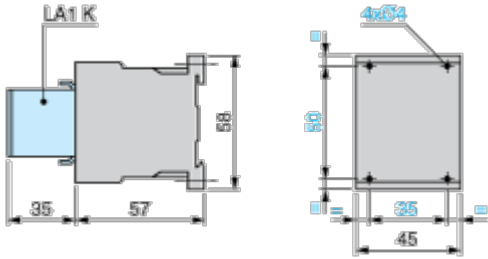

Contactors LC1 K, LP1 K, LP4 K: Mounting on Rail AM1 DP200 or AM1 DE200 (35 mm)

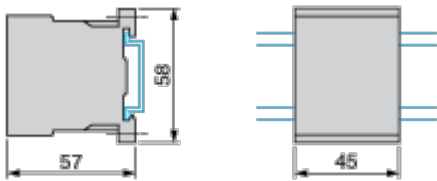


Connections and Schema


Wiring

---

3-Pole Reversing Contactors with Screw Clamp Connections: 3P + N/O

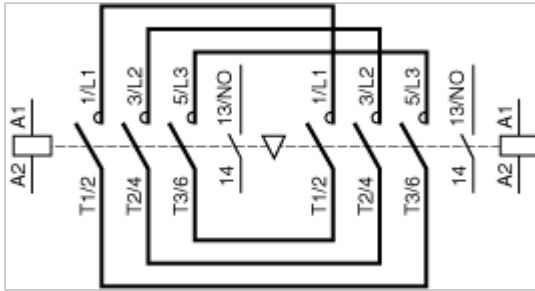

3-Pole Reversing Contactors with Screw Clamp Connections: 3P + N/C

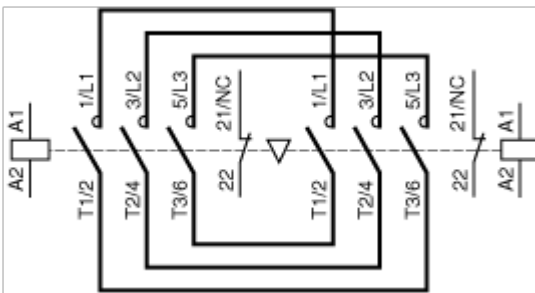


Technical Illustration

Wiring diagram

---

3P NO

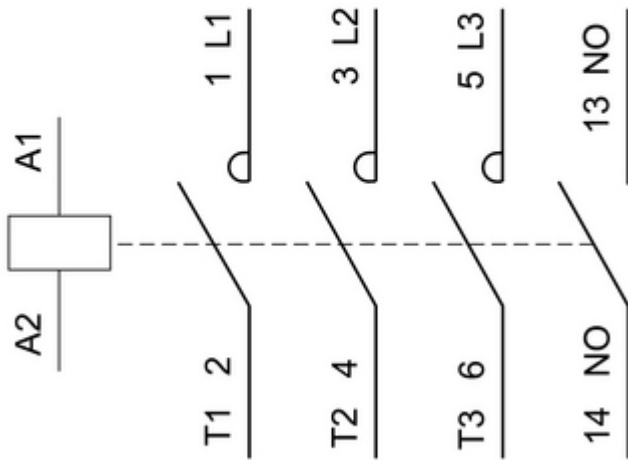

Offer Marketing Illustration

Product benefits / Features

---

## TeSys K

### Technical Benefits



- Built-in in all 3 pole versions: 1NO or 1NC
- Up to 4 more by add-on blocks
- Up to 16 A for motor control (AC3/ AC3E) and 20A for resistive load control (AC1)
- Available as single contactors, star-delta, and reversing combos, with a wealth of options and accessories
- Control Options:
  - AC: 24 to 660/690 V, standard or low-noise versions
  - DC: 12 to 250V, standard or low consumption (1.8 W) versions
- Thermal protection relays
- It Features specific versions for railway (TeSys S207) and electrodomeestic (TeSys S335) applications

Offer Marketing Illustration

Product benefits / Features

---

## TeSys K Contactors



### Flexibility

Designed with control voltages, low consumption, minimal noise levels, robust power connections, and a range of auxiliaries, and application-specific variants to meet diverse needs.



### Safety

It provide ultimate protection with IP20 finger-safe terminals, built-in NO/NC auxiliary contacts, and IEC-certified mirror and mechanically linked contacts for safety applications.



### Compact size

Up to 50% less volume is captured in your panels. One of the smallest contactors offerings in the market



Technical Illustration

Assembly's dimensions

---

